

SUPER ETOT

For Long Distance High Speed Mining Application



130%
Max. Load
Capacity



100%
Off Road

FOCUS ON MINING & CONSTRUCTION INDUSTRY

OFF ROAD




1

Base Rubber
Low Heat Generation
Compound



Tread Rubber
Reinforced Wear Proof
Compound

Tire Performance after Compound Upgrading

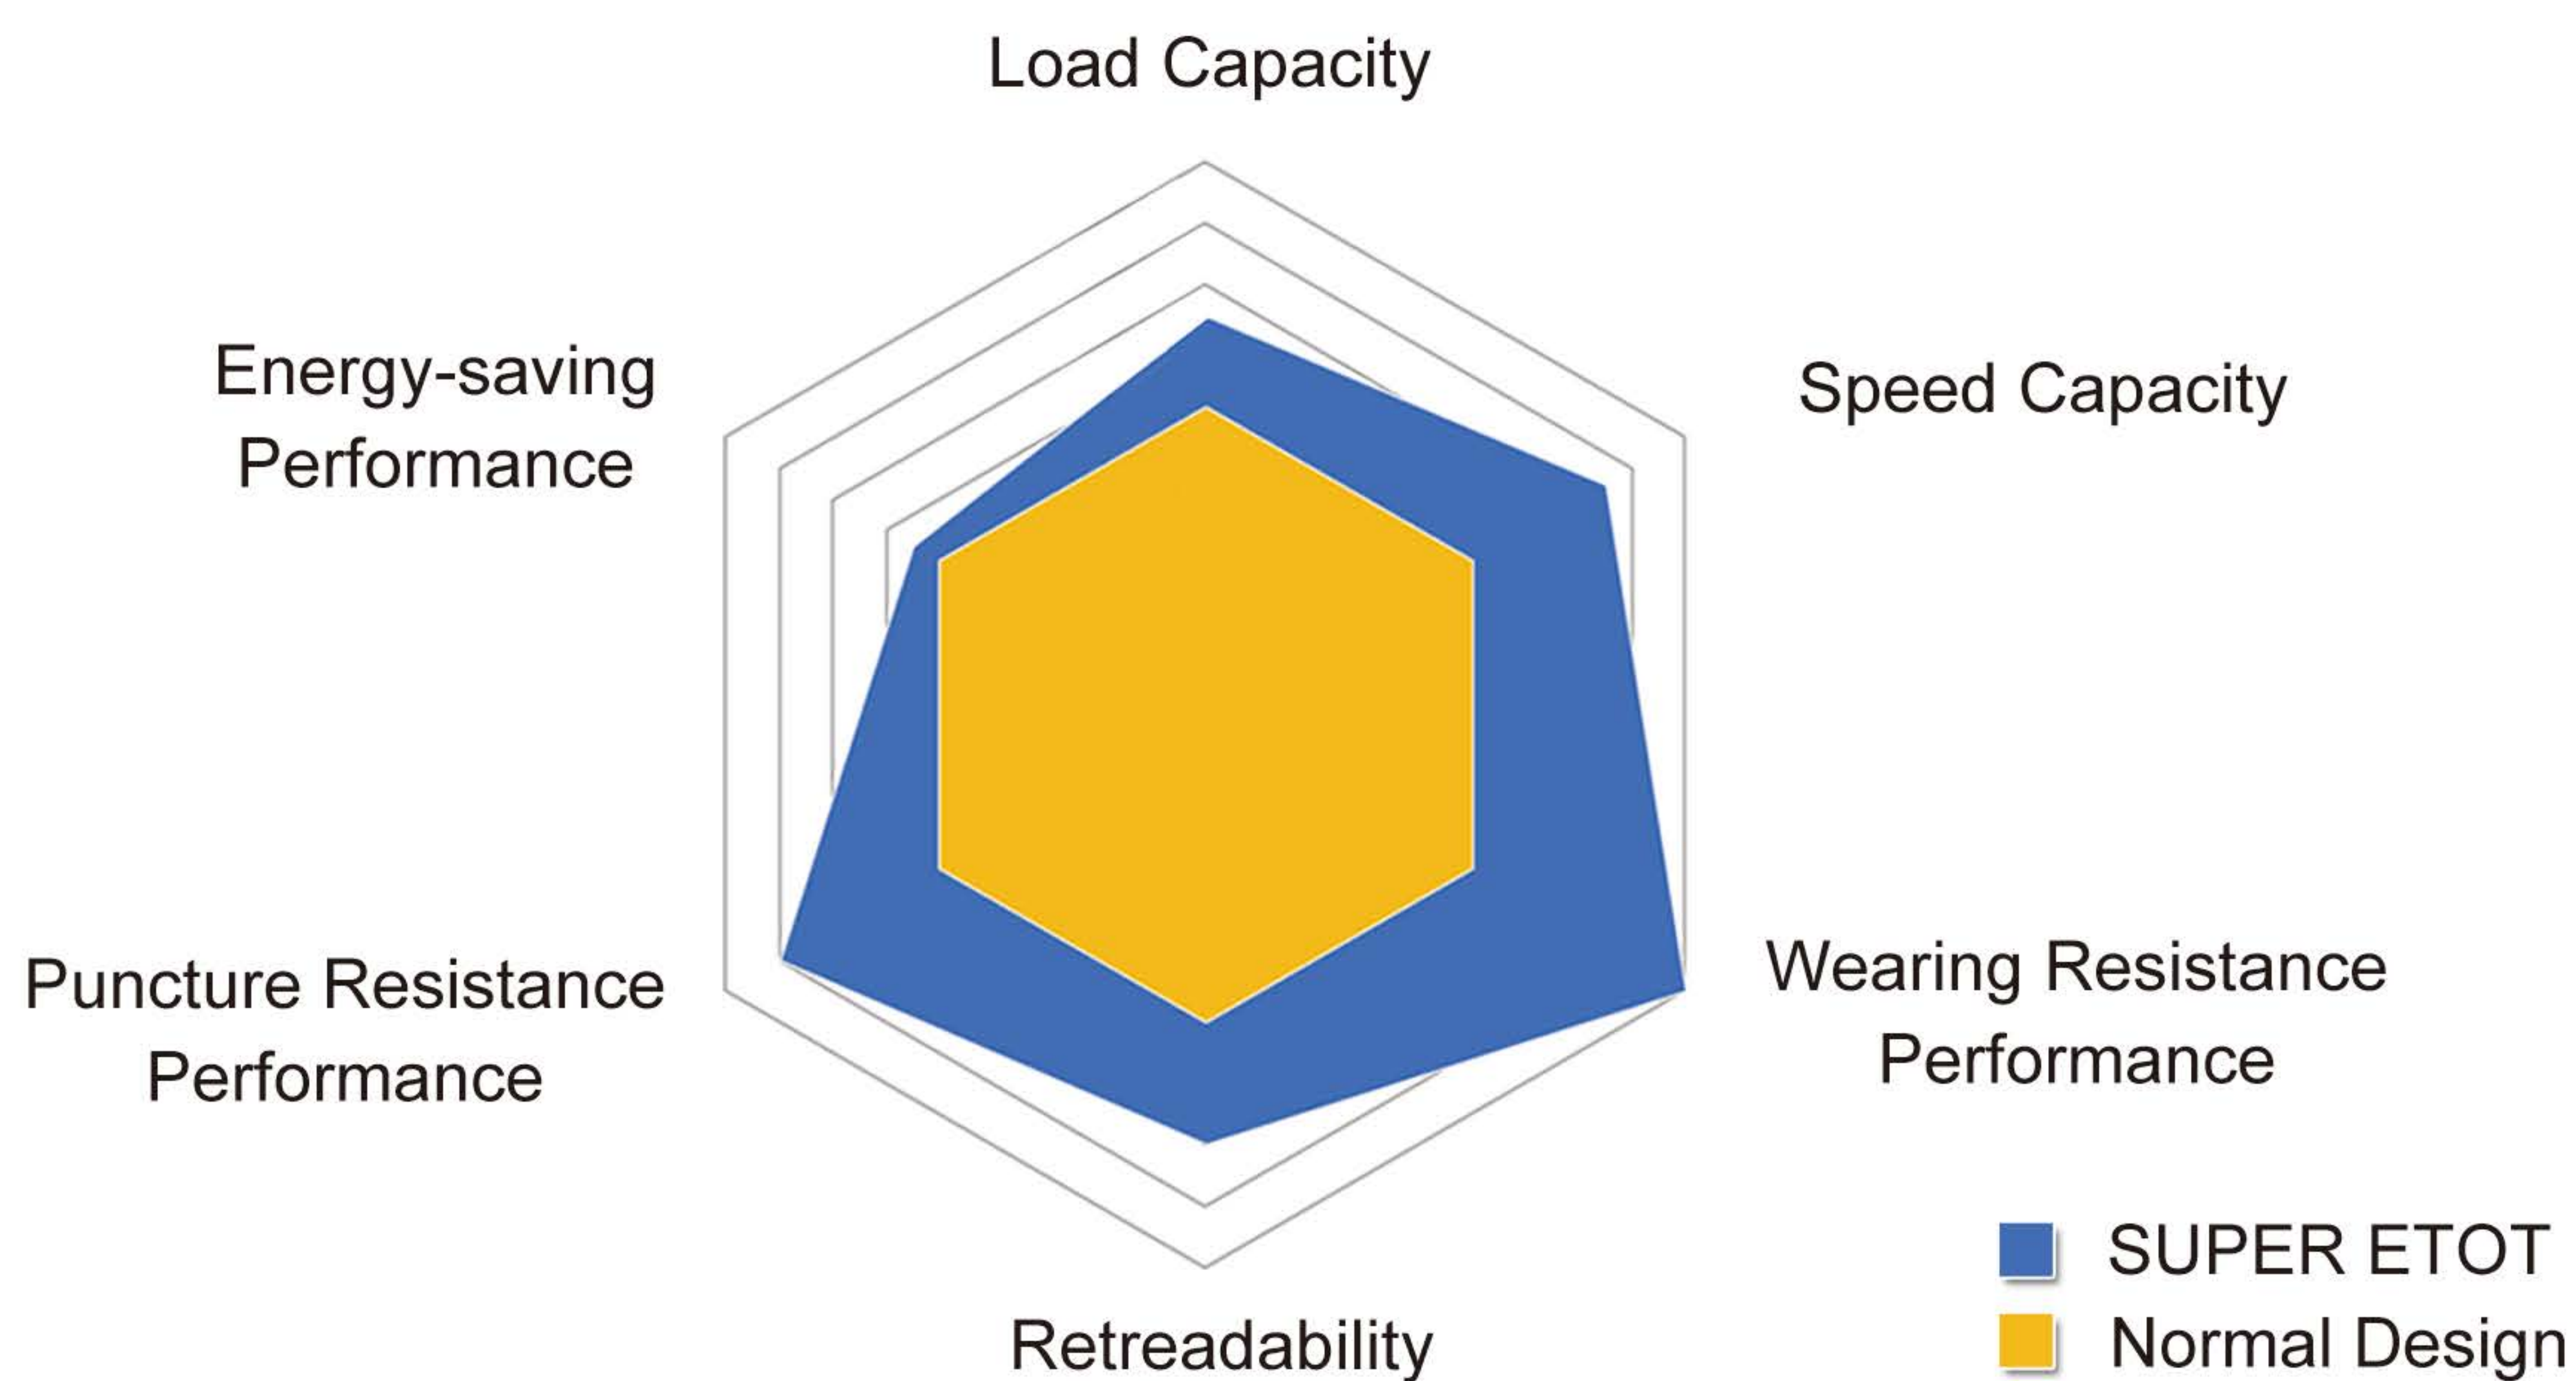

2



High Saturation Pattern Design

3



Better retread performance

Size	PR	Tread Depth (mm)	LI & SS	Load Capacity (kg)		Max. Load Capacity (kg)	Standard Pressure (kPa)	Type
				Single	Dual			
12.00R24	20	32	160/157F	4500	4125	7400	900	TT
315/80R22.5	22	26	164/160F	5000	4500	6500	930	TL
315/80R22.5	22	26	164/160B	5000	4500	6500	930	TL